



Assembly Instructions

Overhead Storage Racks

4' x 8'	3' x 8'	2' x 8'
4' x 6'	3' x 6'	2' x 6'
	4' x 4'	



Eagle Industrial Group, Inc.


23301 Antonio Parkway
Rancho Santa Margarita, CA 92630
877.655.3443
888.313.9228 fax
support@saferacks.com
© EIG Inc. 2008-2021

IMPORTANT

Before you begin your installation, complete the following steps to assemble the 96" side rails.

REQUIRED PARTS

- (4x) 1/4"-20x1/2" Bolt 
- (4x) 1/4"-20 Nut 
- (2x) 52" Riveted Side Rail

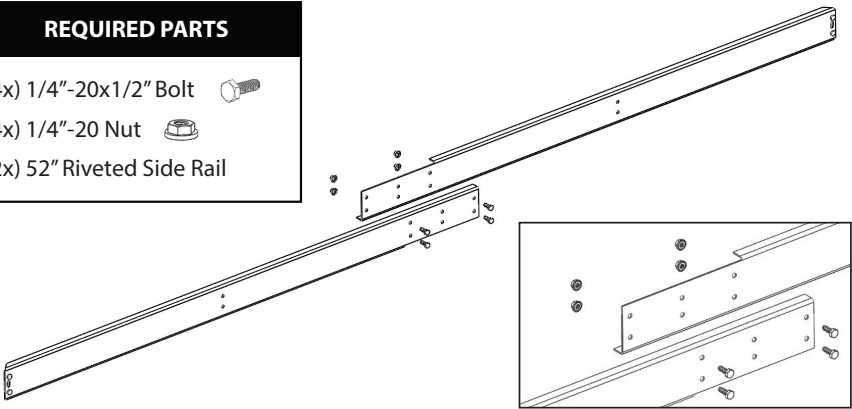

1. Align the holes at the center of the two 52" Riveted Side Rails as seen in the illustration.
2. Using four 1/4"-20x1/2" Bolts and four 1/4"-20 Nuts, assemble the 52" Riveted Side Rails together on the outermost holes as seen in the illustration (Tip: to avoid alignment issues, place the remaining two bolts in the center holes as these will be used for the center support in a later step.)
3. Repeat steps 1 and 2 for the remaining 52" Riveted Side Rails.

If you require any assistance with your installation, please call 877-655-3443

Thank you for purchasing the best Overhead Storage Rack!

SafeRacks is the premier provider of overhead storage racks. Our goal is to provide the highest quality ceiling racks designed to utilize wasted space in your garage. We pride ourselves on delivering the best product while supporting it with outstanding customer service.

WARNING

THIS IS A DO IT YOURSELF (DIY) PROJECT. DO NOT ATTEMPT THIS INSTALLATION WITHOUT BASIC UNDERSTANDING OF THE CONTENTS IN THESE ASSEMBLY INSTRUCTIONS. IF YOU ARE NOT CONFIDENT WITH LOCATING AND ANCHORING THE STORAGE RACK TO THE CEILING JOISTS, DO NOT ATTEMPT THIS INSTALLATION WITHOUT SOMEONE WHO IS.

WARNING. DO NOT EXCEED THE WEIGHT LIMITS

4' X 8' SDF 800 lbs *	4' X 6' Frame 500 lbs
4' X 8' Frame 600 lbs	3' X 6' Frame 400 lbs
3' X 8' Frame 500 lbs	2' X 6' Frame 300 lbs
2' X 8' Frame 400 lbs	4' X 4' Frame 300 lbs

* SDF is our Super Duty Frame with heavy duty ceiling brackets, single 96" C-Channels, single post Vertical Support and 3 Center Supports. SDF racks must be installed by a certified SafeRacks Installer.

WARNING: This weight limit is based on a statically loaded storage rack anchored to a wood framed garage. The joists must have a minimum 2" x 6" (standard lumber) cross section, 24" (or less) apart, with at least 2" of penetration from each lag screw used. For truss framed garage ceiling structures, joists with a 2" x 4" (bottom truss cord) cross section is acceptable. The weakest point in this system is the frame of your house.

Load the overhead storage rack evenly. Load heavy objects nearest the vertical posts and light objects nearest the center. Read the safety label on the rack and do not overload the storage rack. Do not climb on or hang from the storage rack. Routinely inspect the storage rack to ensure rivets and wire decking units are seated properly. The storage rack may experience some deflection the closer the maximum load is approached.

BOTTOM LINE...BE CAREFUL. THESE INSTRUCTIONS, WARNINGS AND NOTES DO NOT REPLACE YOUR SOUND JUDGEMENT AND DECISION MAKING. IF, FOR ANY REASON, YOU FEEL THE QUALITY OF YOUR CEILING STRUCTURE IS IN QUESTION, DISCONTINUE THE INSTALLATION PROCESS IMMEDIATELY. USE THE STORAGE RACK WISELY AND ENJOY YOUR NEW FOUND SPACE!

Gathering Tools and Materials

Before you begin, gather the required tools and components listed below. If any of the listed components in your packaging are missing, please call 877.655.3443.

REQUIRED TOOLS:

- Drill with 3/16" drill bit (capable of drilling 3" deep)
- Socket Wrench set and/or open end wrench or adjustable crescent wrench, socket drivers for drill
- Rubber Mallet or Hammer
- Flat Head Screwdriver
- Tape Measure
- Stud Finder (if installing on ceiling drywall)
- Pencil or Pen
- Sturdy Ladder
- Safety Glasses



COMPONENTS (pictures available on next page):

4' x 8' Unit:

- 8 Vertical Posts
- 2 48" Side Beams
- 4 52" C Channel Beams
- 1 48" Center Support
- 1 Hardware Bag
- 4 27" Ceiling Brackets
- 4 22.5" x 48" Wire Decking Units

4' x 6' Unit:

- 8 Vertical Posts
- 2 48" Side Beams
- 2 72" C Channel Beams
- 1 48" Center Support
- 1 Hardware Bag
- 4 27" Ceiling Brackets
- 3 22.5" x 48" Wire Decking Units

2' x 6' Unit:

- 8 Vertical Posts
- 2 24" Side Beams
- 2 72" C Channel Beams
- 1 24" Center Support
- 1 Hardware Bag
- 4 27" Ceiling Brackets
- 3 22.5" x 24" Wire Decking Units

2' x 8' Unit:

- 8 Vertical Posts
- 2 24" Side Beams
- 4 52" C Channel Beams
- 1 24" Center Support
- 1 Hardware Bag
- 4 27" Ceiling Brackets
- 4 22.5" x 24" Wire Decking Units

3' x 8' Unit:

- 8 Vertical Posts
- 2 36" Side Beams
- 4 52" C Channel Beams
- 1 36" Center Support
- 1 Hardware Bag
- 4 27" Ceiling Brackets
- 4 22.5" x 36" Wire Decking Units

3' x 6' Unit:

- 8 Vertical Posts
- 2 36" Side Beams
- 2 72" C Channel Beams
- 1 36" Center Support
- 1 Hardware Bag
- 4 27" Ceiling Brackets
- 3 22.5" x 36" Wire Decking Units

4' x 4' Unit:

- 8 Vertical Posts
- 4 48" Side Beams
- 1 Hardware Bag
- 4 27" Ceiling Brackets
- 2 22.5" x 48" Wire Decking Units

Hardware Bag (for all racks):

- 8 5/16" Lag Bolts (Grade 8)
- 24* 1/4"-20 x 3/4" Hex Bolt (Grade 5)*
- 24* 1/4"-20 Serrated Hex Nut*
- 32 5/16" Flat Washer
- 8 Black Plastic Plug

* Excess hardware in 4ft and 6ft racks
4ft Racks = 12 excess pieces,
6ft Racks = 8 Excess pieces

Components:

(Drawings below are not to scale)

Vertical Post



Ceiling Bracket



52" C Channel Beams - for 8ft Racks **ONLY**




72" C Channel Beams - for 6ft Racks **ONLY**




Center Support - for 6ft and 8ft Racks **ONLY**



Side Beam




Wire Decking Unit

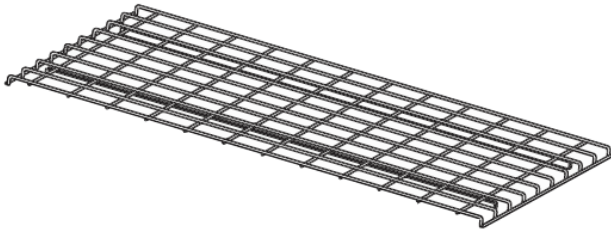

Hardware:

Hex Bolt (x24)




Washer (x32)



Lock Nut (x24)



Lag Bolt (x8)



Plug (x8)



Overview:




Please read through the assembly instructions completely and watch the installation video on our web site before proceeding to installation. Once you understand all of the installation steps, proceed with the installation.

(These instructions depict a 4'x8' size rack being installed; all size racks can be installed based on depending on rack size)


Begin by installing your ceiling brackets (Figure 1).

- There is one ceiling bracket per corner
- Each ceiling bracket fastens to 2 separate joists.

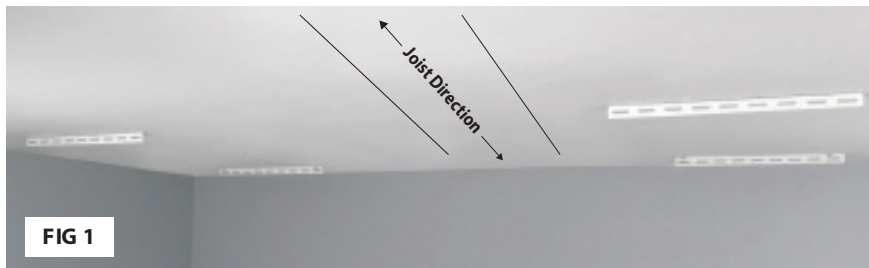

Next, the vertical posts will fasten to the ceiling brackets (Figure 2).

- Each vertical post is made from 2 pieces.
- Those 2 pieces adjust and bolt to the length that you want the rack to hang from the ceiling.

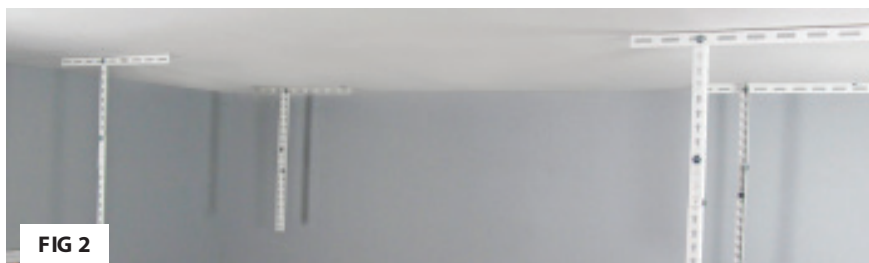

Finally, the horizontal beams and center support will attach to the vertical posts; the decks are placed on the beams to complete your rack installation (Figure 3).



Finding the Perfect Location

- Identify the ceiling location where the overhead rack will be installed.
- Remember you will be utilizing at least the same area on the ceiling as the size rack you are installing.
- Determine how far down from the ceiling you want the rack to hang.
- Be sure to take into consideration objects that could come into contact with the racks: garage doors, garage access doors, overhead lights, automobiles.
- If the garage ceiling is finished with drywall, use a stud finder and locate the ceiling joists that are in the area of the installation.
- Determine the joist direction that applies to the installation.
- Ceiling Brackets may be installed parallel or perpendicular to joists.
- In most cases, joists will run from the front of the garage to the back.
- In other cases, they will run side to side. In rare cases, ceiling joist may be at odd intervals, greater than 24" apart, or even switch directions in different parts of your ceiling (If this is the case please contact us and we can supply longer ceiling brackets to suit your needs).

Installing the Ceiling Brackets

- Once the location of the rack has been identified, use a stud finder to located the joist on either side of where you intend the first vertical post to hang
- Mark the edges and center of each joist (Figure 4).
- If needed, verify the edges and center of the joist by using a small nail and punching holes along your pencil lines (Figure 5).

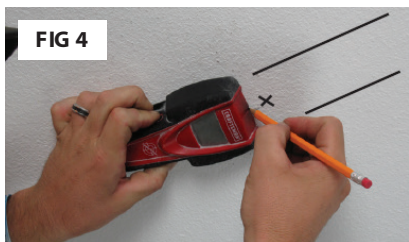


FIG 4

Mark Both
Sides And
Center Of The
Ceiling Joist




FIG 5


Using a 3/16" drill bit, drill a pilot hole 3" deep at each center marked location. Ensure that the holes are in the center of each joist. Screw the 3" lag screws through the ceiling bracket into the drilled pilot holes using a washer under the head of each screw (Figure 6).



FIG 6


Option 1: If the ceiling bracket is being placed in the corner of the wall and ceiling, and 2 joists are not available for anchoring, you can install the lag bolts into the wall header if one is present (Figure 7).

Note: If this option is chosen, install the ceiling bracket 1 ½" from the wall, so that you can access the back of the bracket to install the nut and bolt for the vertical post in the next step (Figure 8).

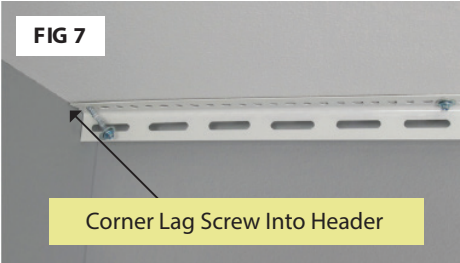


Option 2: If the vertical posts are centered on a wall stud, you can screw the vertical post directly to the wall stud. Use 3 washers total per lag screw, 2 against the wall and 1 on the head of the lag screw (Figure 9).

Note: If this option is chosen, install the lag screws loosely at first to ensure room for assembling the rest of the rack and leaving room for the wire decking which sits over the lip of the rack.



- Once the first ceiling bracket is installed, measure for the remaining brackets (Figures 10, 11, 12, and 13).
- For the short side, measure 48 ½" to the location of the next bracket. (36 ½" or 24 ½" for other rack sizes).
- On the long side, measure 96 ½" to the location of the next bracket. (72 ½" or 48 ½" for other rack sizes)



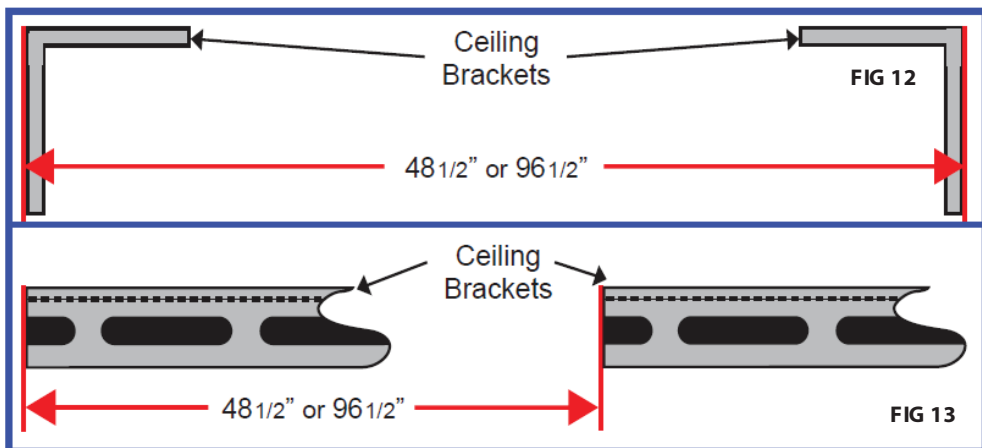

Note:

- If the ceiling brackets are facing each other, measure directly from the back of one bracket to the back of the opposite facing bracket (Figure 12).
- If the brackets are in-line, the measurement can be from one edge of the bracket to the same edge on the next bracket (Figure 13).
- The measurement could also be taken from a point in the middle of the bracket where the vertical post is expected to hang. Or, if the joist spacing is consistent across the ceiling, you can count the number of joists for the correct distance between the brackets.


Assembling and Attaching the Vertical Posts

- Adjust the length of the vertical posts to the desired distance from the ceiling.
- Ensure the lower section of the vertical post is placed on the inside of the two post

IMPORTANT: : Ensure the skinny sections of the teardrop holes are facing down, and that all vertical posts are adjusted to the exact same length (Figure 14).

- Secure these posts together using two nuts, two bolts, and two washers. Ideally put one nut and bolt assembly on each face of the vertical posts. One bolt at the top and the other at the bottom, where the vertical post sections overlap (Figure 14).

- Next, using a single bolt with two washers (one on each side) and a locking nut, connect the the ceiling bracket that was installed in the previous step (Figure 14).

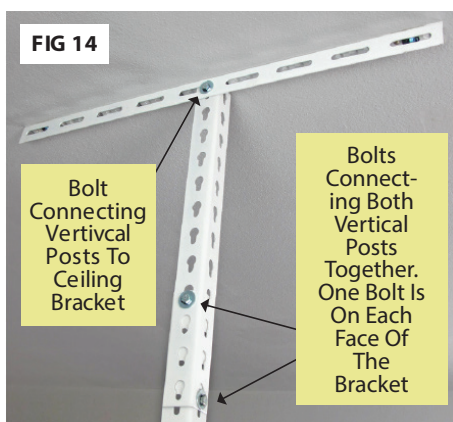

EXPLORE FEATURED

PRODUCTS

VETERAN
OWNED-BUSINESS

USA
COMPANY

WALL SHELVES

SafeRacks Shelves are perfect for areas in you garage where you need quick access to your things.

- ✔ Mount in a closet,
- ✔ over your washer/dryer,
- ✔ (or) next to the workbench.



WALL TRAX

These 48" Wall Trax come with a number of hook options.

CHOOSE FROM OUR
STARTER KITS DESIGN FOR:

BIKES, SKIS, GARDEN TOOLS AND MORE!



GARAGE SHELVEING

Originally designed for commercial use, SafeRacks garage shelving is adapted for residential purposes while maintaining the high quality and durable powder coat finish required in industrial applications.

AVAILABLE IN *multiple sizes,*
and *two colors*



mix and match with **modular configurations.**



GARAGE FLOORING

Constructed of a flexible, yet durable material; our tiles can endure high load capacities and heat, and resist damage from most household chemicals.

AVAILABLE IN **black and grey.**



WIRE SHELVING

Constructed from high strength steel with industrial zinc coating, these NSF Certified shelves can hold up to 500lb

AVAILABLE IN **multiple sizes.**




Note:

- For now, leave the vertical posts slightly loose on the ceiling brackets so that they can move back and forth during the next step. They will be tightened down in the upcoming steps.
- When installing the vertical posts to ceiling brackets that are in-line (Figure 13), ensure that the vertical posts are 48" or 96" apart (depending on the orientation of the rack).

CEILING BRACKETS AND VERTICAL POSTS


Our ceiling brackets are intended to be installed with a minimum of two Lag Screws. Please refer to the figures below for the correct way of positioning the vertical posts on the ceiling bracket.

INSTALLED CORRECTLY

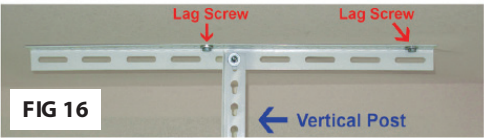


ALWAYS install the vertical posts between the lag screws in the ceiling bracket (Figures 15 & 16).

INSTALLED INCORRECTLY

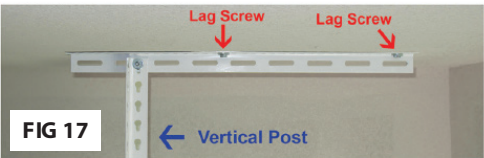

DO NOT attach the vertical posts outside of the lag screws in a cantilevered fashion (Figures 17 & 18).

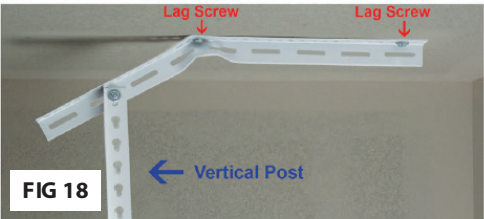

WARNING If you install the ceiling bracket & vertical posts as shown in (Figure 17), the ceiling brackets will bend, causing your storage items to fall to the floor (Figure 18).

Attaching the Outside Frame

- Once all vertical posts are in place, install the side beams.
- Place the rivets of the beams in the bottom 2 holes of the vertical posts (Figure 19).

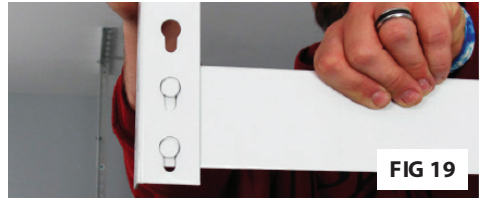


FIG 19

- Ensure the small lip is on the top, and that the side beams are on the inside of the vertical posts (Figure 20).



FIG 20

- Use a rubber mallet to hammer the rivets into the bottom of the teardrop holes (Figure 21).

WARNING: Opposite ends may come loose when hammering beams. Use a helper to ensure rivets do not come loose during the seating process.



FIG 21

- Finish with installation of the C Channel Beams.
- Line up the 45 degree angle on the end of the small lip to the same angle on the side beams. Each corner should look like (Figure 22).



FIG 22

NOTE:

- If the rivets are not seating correctly, check if the vertical posts are truly vertical.
- If the vertical posts are at an angle, the rivets will not seat properly.
- Make adjustments to the placement of the vertical posts or ceiling brackets if the vertical posts are severely out of alignment.

Attaching the Center Support

- Connect the center support (not included with the 4x4) using the remaining hex bolts and lock nuts (Figure 23).
- Use a wrench to fully tighten the bolts and nuts





- Once the center support is installed go back and tighten the vertical posts to the ceiling brackets (Figure 24).



Placing the Wire Decking

- Take the wire decking and place it on the rack unit (Figure 25).
- Wire decking remains in place by gravity and can slide freely side-to-side.
- There will be a small space between each deck (Figure 26).
- Take one last look at all of the rivets to make sure they have not backed out during the installation. process.

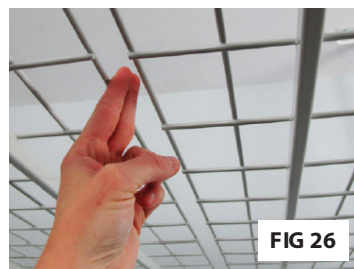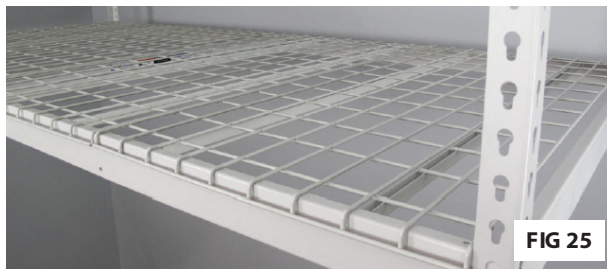

- Look at the ceiling brackets and lag screws to make sure that they have not pulled out during the beam seating process. If they have, it is an indication that the lag screws may not be in the center of the ceiling joist, or that they were not fully tightened when installed.
- Finally, check all the nut and bolt connections on the vertical posts and ceiling brackets to ensure that everything is tight.
- **CONGRATULATIONS!** You are now ready to load your rack and enjoy the extra space that you have created (Figure 27).



WARNING: Load heavy objects, distributed equally, nearest the vertical posts and light objects nearest the center. Read the safety label on the rack and do not overload the system. Do not climb on or hang from the storage rack. Routinely inspect the rack over time to ensure rivets and wire decking units are seated properly.

WARNING. DO NOT EXCEED THE WEIGHT LIMITS

4' X 8' SDF 800 lbs *	4' X 6' Frame 500 lbs
4' X 8' Frame 600 lbs	3' X 6' Frame 400 lbs
3' X 8' Frame 500 lbs	2' X 6' Frame 300 lbs
2' X 8' Frame 400 lbs	4' X 4' Frame 300 lbs

* SDF is our Super Duty Frame with heavy duty ceiling brackets, single 96" C-Channels, single post Vertical Support and 3 Center Supports. SDF racks must be installed by a certified SafeRacks Installer.


All stated weight limits are based on static loads with load distribution as stated above. Some horizontal deflection can be expected when the racks are loaded near maximum limits.

REFER TO THE WARNING PAGE ON INSIDE COVER OF THIS MANUAL FOR ADDITIONAL INFORMATION.

ATTENTION



ADDITIONAL COMPONENTS REQUIRED FOR ASSEMBLY

(8) Plugs



- After attaching the outside frame as seen on page 10 of your instruction manual, check to ensure side beams are completely seated in the vertical posts.
- Place plugs into the remaining holes located above the bottom rivet in each corner. Use two plugs per corner and eight plugs total per rack (Figures 1 & 2).


NOTE: The plugs fit very tight and need some pressure to place into the remaining holes

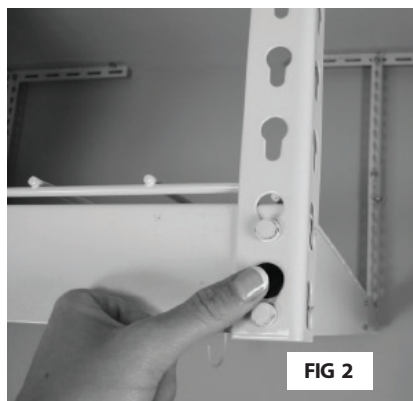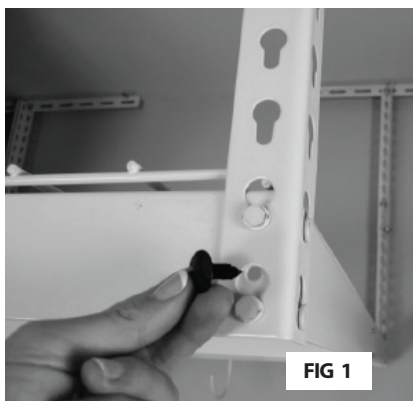



Multiple Racks

- If installing multiple racks, end-to-end or side-by-side, a 27" ceiling bracket should be utilized per corner, per rack.
- At the corners where 2 vertical posts will be hanging side by side, install the ceiling brackets back to back and utilize 2 lag bolts per bracket as outlined on page 6 (Figures 6, 28 & 29). Depending on the direction of the ceiling joist in relation to the racks, the vertical posts will either be located on opposite sides of the ceiling brackets (Figure 29), or they will be located on the same side of the ceiling brackets (Figure 28). In either orientation, run the hex bolts through both ceiling brackets.

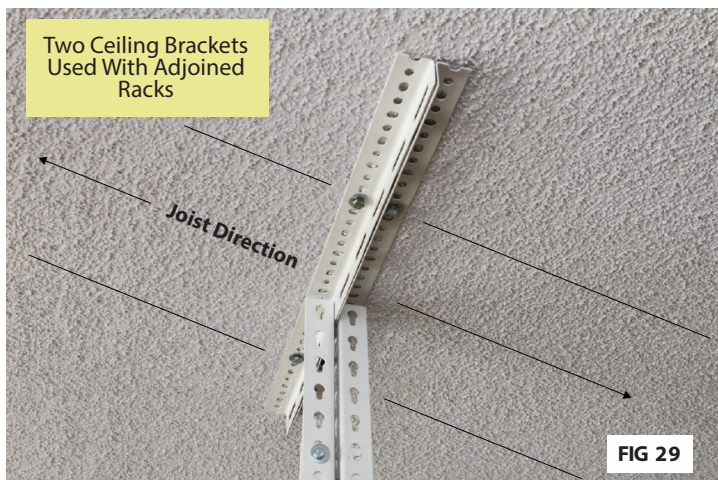

Accessories Sold Separately Online:

- Increase the storage capacity and/or functionality of your overhead racks with these popular accessories
- We offer many accessories including: Rail Hooks, Utility Hooks, and Deck Hooks (Figure 30).



Deck Hook

The Deck Hook is designed for easy installation; just snap into over two wires. (Figure 31)



Rail Hook

The Rail Hook is similar to the Deck Hook in its shape, but is designed to hold items around the edge of the SafeRack. (Figure 32)



Utility Hook

The Utility Hook is designed for longer items and it attaches to the vertical posts with bolts, washers & locking nuts. (Figure 33)




Questions or Concerns?

SafeRacks are engineered and designed to be the strongest garage overhead storage rack available. If you have any questions or concerns we are available to help you over the phone at 877-655-3443. Our customer service is waiting to answer any questions you might have.

On our web-page, we offer many different examples of garages that can help you determine where in your garage the SafeRack would fit best. There are also installation videos available at www.SafeRacks.com to walk you through the process step by step.

Need it Installed?

Call **877.655.3443** to Schedule Your
Installation Appointment!

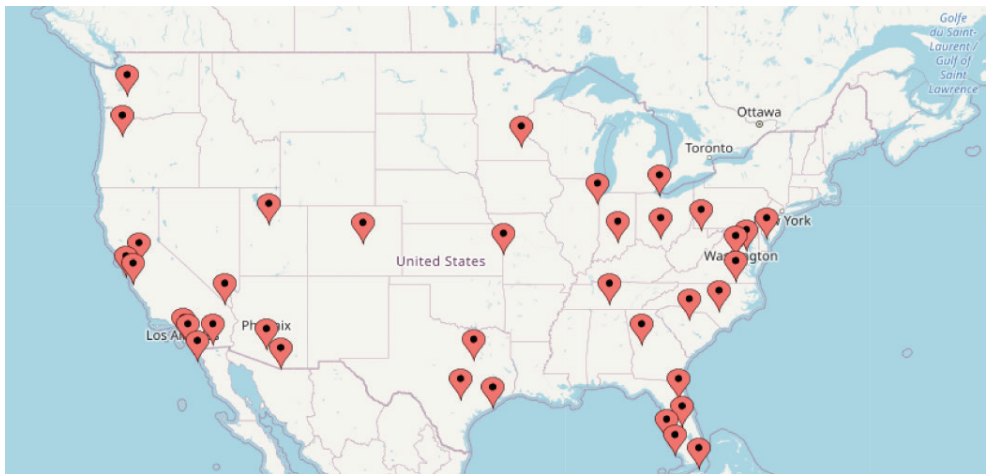

LIMITED LIFETIME WARRANTY

ALL EAGLE INDUSTRIAL GROUP, INC. (DBA SAFERACKS, MONSTERRAX, HERCKE) OVERHEAD STORAGE RACKS

For a period of (30) thirty days from the date of purchase, should you not be satisfied with your product, you are entitled to a full refund less taxes, shipping & handling costs paid by the buyer.

What Is Covered? Eagle Industrial Group Inc. (EIG) warrants its overhead storage rack materials from manufacturing defects and defects from the product's workmanship for the lifetime of the product. The Limited Lifetime Warranty applies to the original Purchaser. The original Purchaser must provide the original sales receipt and proof of purchase from an approved dealer with any request for warranty claims.

What Will EIG Do? During the warranty period, EIG will repair or replace any product that fails to be limited to necessary adjustments or parts replacement and does not include re-installation at the installation site. Re-installation is the responsibility of the original Purchaser. This warranty does not cover any labor costs associated with service, removal or re-installation of parts. At the option of EIG, the original purchase price may be refunded to the original Purchaser for a full refund and complete compensation of defect. Please contact the EIG Dealer with whom the original purchase was made. Taxes, shipping and handling charges will be the sole liability of the original Purchaser.

What Is Not Covered? The warranty applies to the original Purchaser for home, personal use only. No coverage is provided if the product is transferred to another structure. The original Purchaser or licensed dealer and the defect is not a result of improper or abusive treatment or improper installation. Coverage is not provided for discoloration, corrosion, rust or physical damage. Damage is not covered if storage loads are not evenly dispersed, as outlined in this manual, or the maximum load capacity exceeds those listed in this manual. If any other parts (not provided by the EIG manufacturer) are used in conjunction with the EIG product, the warranty shall be void.

THE WARRANTY WILL NOT BE IN EFFECT SHOULD THE INSTALLATION NOT ADHERE TO THE PUBLISHED INSTALLATION INSTRUCTIONS PROVIDED WITH EACH UNIT. THE WARRANTY DOES NOT PROVIDE COVERAGE IF THE PRODUCT MALFUNCTION IS DUE TO SHIPPING DAMAGE, PRODUCT MODIFICATION, IMPROPER INSTALLATION, IMPROPER MAINTENANCE, EFFECTS FROM BEING CONTACTED WITH A VEHICLE OR ANY OF ITS PARTS, OR CLAIMS MADE OUTSIDE THE WARRANTY PERIOD.

Warranty Limitations: No other warranties are expressed or implied for the storage product. In the absence of an implied warranty period under state law, seven years shall be the term of the implied warranty. EIG makes no other warranties under the terms of the Limited Lifetime Warranty and the option of repair or replacement is EIG's only obligation. EIG is not responsible for any other special, consequential (including substrate failure) or incidental damages resulting from the purchase or installation of the unit, regardless of cause. Liability for any such losses (including, warranty is expressly disclaimed and excluded herein. Upon installing any EIG overhead storage unit, the customer agrees that he/she is utilizing the EIG overhead storage unit for personal, non-commercial, use only. By installing any EIG overhead storage unit, the customer agrees to the warranty and agrees that the delivered product was to his/her satisfaction and that installation was done per the - instructions outlined in the "Assembly Instructions" manual provided with the purchased unit.

How State Law Relates To The Warranty: Please consult your state's laws regarding warranties. You may have rights in addition to the Limited Warranty. Some states do not allow limitations on how long an implied warranty lasts or limitations on incidental or consequential damages. So the above limitations or exclusions may not apply to you.

Outside the 50 United States and Canada, this warranty does not apply

Prop 65 Warning: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.ca.gov